

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 026 911 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
09.08.2000 Bulletin 2000/32

(51) Int. Cl.⁷: H04Q 7/36

(21) Application number: 00300740.8

(22) Date of filing: 31.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Sanjay, Kasturia
Pal Alto, CA 94306 (US)


(74) Representative:
Buckley, Christopher Simon Thirsk et al
Lucent Technologies Inc.,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)

(30) Priority: 04.02.1999 US 244645

(71) Applicant:
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(54) Code and spectrum reuse in a sectorised CDMA system

(57) A system and a method for code division multiple access (CDMA) communication. The system (11) includes fixed terminals (13) communicating with a central base station (12). The terminals in protection sectors (14-21) of each sector (1 to 4) are configured to employ codes from different sets of codes to overcome potential mutual interference between sectors on account of antenna radiation pattern roll-off. The remaining codes, preferably the majority of the available codes, are used in any one of a plurality of basic sectors (22-25), each of which separates the protection sectors of a respective sector. For an even number of sectors in a cell, the available codes are partitioned into three groups, two for the protection sectors and one for the basic sectors. For an odd number of sectors in a cell, the available codes are partitioned into four groups, three for the protection sectors and one for the basic sectors. Protection sectors are relatively narrow but broad enough to counteract the potential mutual interference between sectors.

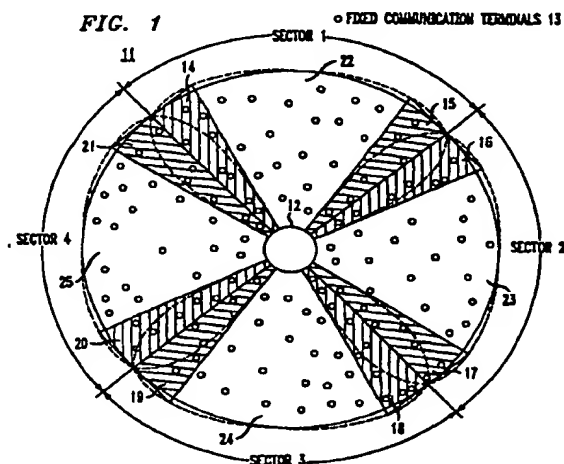

EP 1 026 911 A2

BEST AVAILABLE COPY

Description

Field Of The Invention

[0001] This invention relates to code division multiple access communication systems and to methods for operating them, particularly to such systems and methods in a fixed wireless loop environment.

Discussion Of The Related Art

[0002] Code Division Multiple Access (CDMA) has become one of the major technologies for digital wireless communication in the U.S. and worldwide. Growing demand for the service provided by fixed wireless loop systems based on CDMA exists particularly in those countries and areas that are insufficiently supplied with basic telephone infrastructure. In particular, the demand has grown for telephone connections of sufficient bandwidth and quality for convenient access to the Internet.

[0003] In systems addressing this need, the users are static and their locations are known. In this environment, digital wireless communication is provided in a fixed arrangement of cells containing fixed terminals. As an example for such a fixed wireless loop CDMA system, the code-limited capacity may be 128 channels, minus those used for pilot and control channels. For implementation, several options exist. First, the base station of each cell could use an omnidirectional antenna. Second, the cell can be divided into a number of sectors with a base station antenna for each sector. Codes can be reused in non-interfering sectors, but the inevitable overlap of the antenna patterns leads to further options to avoid mutual interference between adjacent sectors. Thus, the third and fourth options pertain to multiple-sector cells and involve, respectively, using different portions of available bandwidth in adjacent sectors subject to mutual interference, or using different ones of the available codes in adjacent sectors subject to mutual interference. Further growth in demand currently can be met only by increasing the number of cells and the number of relatively expensive base stations. It is desirable to have a better way to meet increases in demand in such a CDMA system.

Summary Of The Invention

[0004] According to the invention, in a fixed wireless loop CDMA system having multiple sectors, there are established two protection sectors at both edges of each sector. The purpose of the protection sectors is to prevent mutual interference between adjacent sectors resulting from the roll-off of the radiation patterns of the sector antennas. The remaining part of a sector separates the protection sectors and will be called a basic sector. The spreading codes are divided among all sectors so that two neighboring sectors, no matter whether a protection sector next to a protection sector, or a protection sector next to a basic sector, do not have any codes in common. The two protection sectors on opposite edges of the same sector use codes from the same group of codes. In cells with an even number of sectors, three groups of codes are sufficient, one group for the basic sectors and two groups for the protection sectors. Cells with an odd number of sectors need four groups of codes, one for the basic sectors and three for the protection sectors.

Advantageously, all of the codes not used in the protection sectors are used in any one of the basic sectors.

Specifically, in a system according to a first aspect of the invention, each of the terminals in a protection sector or a basic sector is configured to use an assigned specific code from an appropriate one of the groups of codes.

Further specifically, in a method according to a second aspect of the invention, codes from appropriate ones of the groups of codes are assigned to terminals in protection sectors and basic sectors.

Protection sectors are relatively narrow but broad enough to counteract the potential mutual interference between sectors.

Brief Description Of The Drawing

Further features and advantages according to both aspects of the invention will become apparent from the following detailed description, taken together with the drawing, in which:

Fig. 1 is a block diagrammatic and schematic showing of a first implementation of the invention in a CDMA system having fixed terminals in which each cell has multiple sectors; and

Fig. 2 is a flow diagram of the method of the invention.

Detailed Description

In Fig. 1 a fixed wireless loop cell 11 includes a cell base station 12 and a substantial number of fixed communicating terminals 13. Cells like cell 11 typically are useful in areas that are insufficiently supplied with basic telephone infrastructure, particularly the right-of-ways, lines, cables, substations, and telephone hybrid junctions used in developed urban and suburban areas in the United States. Nevertheless, such a cell can also be used as an overlay providing additional capacity in areas having significant infrastructure. While a single cell is shown, typically a large number of such cells, arranged as needed, would be used.

Cell base station 12 illustratively uses four antennas, each of which can comprise an antenna array, to define four sectors, labeled sector 1, sector 2, sector 3, and sector 4, respectively. Each fixed terminal

[0020] For any antenna used in this system, an initial step (not shown) of the method should be determining the physical extent of potential mutual interference of the radiation patterns of the separate antennas. That extent is the extent of the radiation pattern roll-off beyond each nominal boundary of the sector served by each antenna. Thus, for any antenna, the proper width of the protection sectors will be determined. This initial step needs to be done only once for any situation where identical antennas will be used.

[0021] In the implementations of the invention described herein, all of the frequency spectrum of the CDMA system and most of the available codes of the CDMA system are used in each of the sectors 1-4 of the fixed wireless loop cell. A significantly higher capacity results than in the prior art cases in which the use of the available bandwidth is halved in each sector or in which the use of the available codes is halved in each sector. The advantage results from partitioning the available codes into three groups, for an even number of sectors, two groups for use in the protection sectors to avoid interference and the third group for use in any of the basic sectors, in which no interference is likely.

[0022] While the exemplary implementation to be described for Fig. 1 uses four sectors in a cell, in principle the cell could have any number of sectors, two or greater, preferably an even number, so long as a significant basic sector remains in each sector of the cell. It is noted that six sectors per cell are widely used in existing systems, as are also three sectors per cell. When an odd number of sectors is used in a cell, the available codes should be partitioned into four non-overlapping sets, according to the present invention. These code sets comprise three for the protection sectors and one for the basic sectors. The result is somewhat less efficient than the result when using an even number of sectors.

[0023] It should be clear that many variations of the implementations of the system and method of the invention of the can be made within the spirit and scope of the invention. that is, within the scope of the following claims and their equivalents.

Claims

1. A code division multiple access communication system, comprising:

at least one base station having a plurality of antennas radiating to a plurality of sectors of a fixed wireless loop cell, each sector including two protection sectors and a basic sector between said two protection sectors; and

in each of said sectors, a respective plurality of fixed terminals configured to send and receive code division multiple access signals to and from said base station, ones of said terminals

in protection sectors subject to potential mutual interference being further configured to send and receive code division multiple access signals using codes selected from different sets of codes, and ones of said terminals in said basic sectors being configured to send and receive code division multiple access signals using codes that are not in any of said different sets of codes.

2. The code division multiple access communication system according to claim 1, wherein the protection sectors of a sector are no broader than necessary to counteract said potential mutual interference.
3. The code division multiple access communication system according to claim 1, wherein the plurality of antennas comprise an even number of antennas, and the cell has an even number of sectors.
4. The code division multiple access communication system according to claim 3, wherein all of the terminals in the protection sectors of the cell are configured to use no more of the available codes than are necessary to counteract said potential mutual interference.
5. In a code division multiple access communication system having at least one base station in a cell communicating with a plurality of fixed terminals in a plurality of sectors of the cell, each sector including two protection sectors and a basic sector between the two protection sectors, a method for improving use of codes by the terminals, comprising the steps of

reserving different sets of codes for assignment to terminals in protection sectors subject to potential mutual interference; and

assigning remaining codes not in any of said different sets of codes to terminals in the basic sectors, any of said assigned remaining codes being usable in any of said basic sectors.

6. The method of claim 5, wherein the protection sectors of a sector are no broader than necessary to counteract said potential mutual interference.
7. The method of claim 5, wherein the cell has an even number of sectors, and the reserving step reserves only two different sets of codes for use in protection sectors, a third set of codes being usable in any of said basic sectors not subject to potential mutual interference.
8. The method according to claim 7, wherein the reserving step reserves the two different sets of

codes, which comprise no more of the available codes than are necessary to counteract said potential mutual interference.

5

10

15

20

25

30

35

40

45

50

55

5



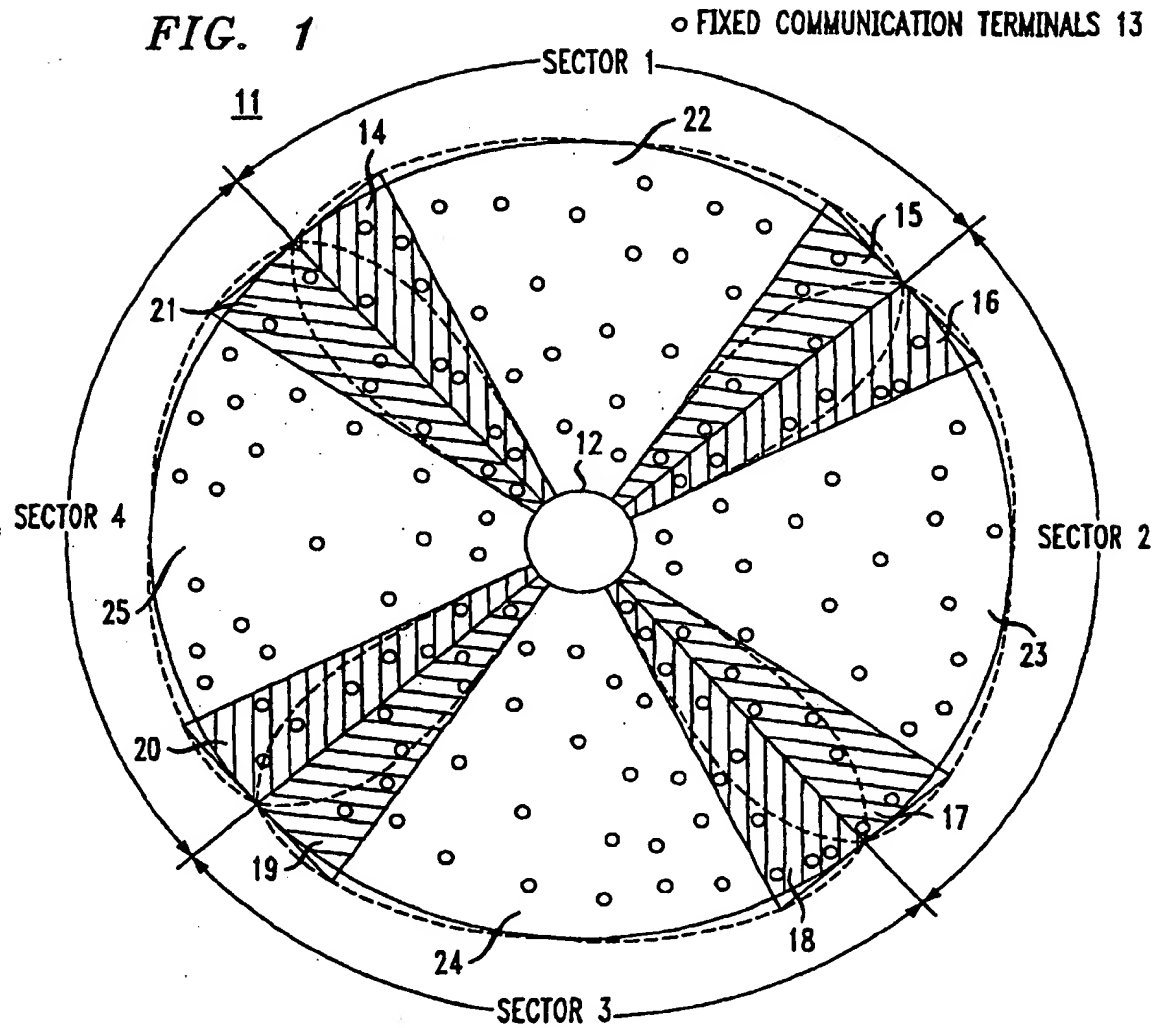


FIG. 2



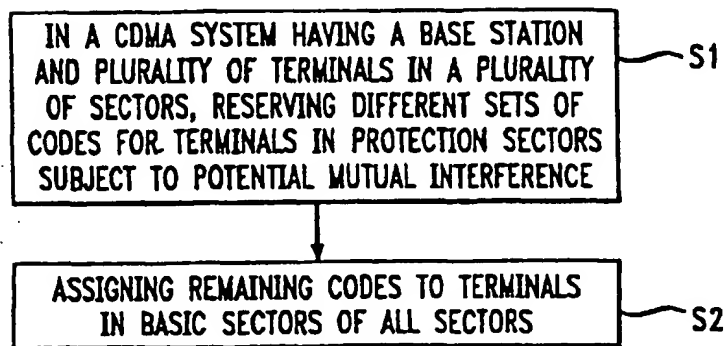

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 026 911 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
23.08.2000 Bulletin 2000/34

(51) Int. Cl.⁷: H04Q 7/36

(43) Date of publication A2:
09.08.2000 Bulletin 2000/32

(21) Application number: 00300740.8

(22) Date of filing: 31.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Sanjay, Kasturia
Pal Alto, CA 94306 (US)


(74) Representative:
Buckley, Christopher Simon Thirsk et al
Lucent Technologies Inc.,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)

(30) Priority: 04.02.1999 US 244645

(71) Applicant:
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(54) Code and spectrum reuse in a sectorised CDMA system

(57) A system and a method for code division multiple access (CDMA) communication. The system (11) includes fixed terminals (13) communicating with a central base station (12). The terminals in protection sectors (14-21) of each sector (1 to 4) are configured to employ codes from different sets of codes to overcome potential mutual interference between sectors on account of antenna radiation pattern roll-off. The remaining codes, preferably the majority of the available codes, are used in any one of a plurality of basic sectors (22-25), each of which separates the protection sectors of a respective sector. For an even number of sectors in a cell, the available codes are partitioned into three groups, two for the protection sectors and one for the basic sectors. For an odd number of sectors in a cell, the available codes are partitioned into four groups, three for the protection sectors and one for the basic sectors. Protection sectors are relatively narrow but broad enough to counteract the potential mutual interference between sectors.

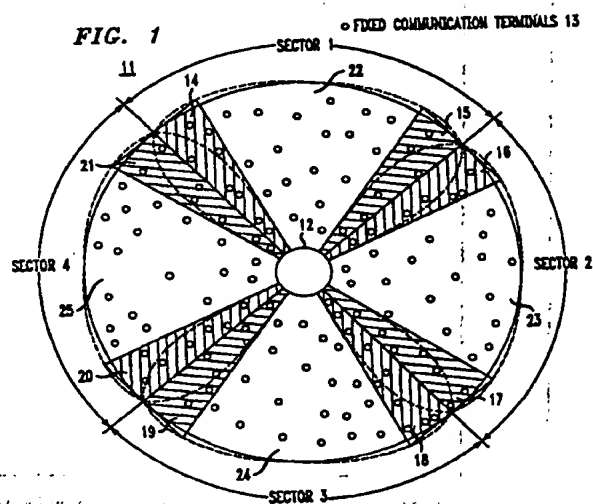

EP 1 026 911 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 0740

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 428 818 A (MEIDAN ET AL) 27 June 1995 (1995-06-27) * column 6, line 34 - column 11, line 12 *	1-3,5,6	H04Q7/36
A	WO 98 59512 A (TELEFONAKTIEBOLAGET LM ERICSSON) 30 December 1998 (1998-12-30) * page 9, line 11 - page 11, line 19 * * figure 3 *	1,3,5,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04Q
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 6 July 2000	Examiner Behringer, L.V.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P0401)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 0740

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-07-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5428818 A	27-06-1995	IL 100028 A	07-10-1994
		US 5678187 A	14-10-1997
		US 5809401 A	15-09-1998
		CA 2098580 A	12-05-1993
		GB 2266434 A,B	27-10-1993
		HK 1000430 A	20-03-1998
		KR 9612086 B	12-09-1996
		SE 9302362 A	08-07-1993
		WO 9310601 A	27-05-1993
WO 9859512 A	30-12-1998	AU 8044098 A	04-01-1999
		EP 0992169 A	12-04-2000
		SE 9702408 A	25-12-1998

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.